



Composite Hose Handling Guide

Dantec hoses are manufactured from the finest materials, to the highest specifications, for service in arduous conditions. To ensure long, trouble free service from these robust versatile hoses we advise the following installation procedures


INCORRECT

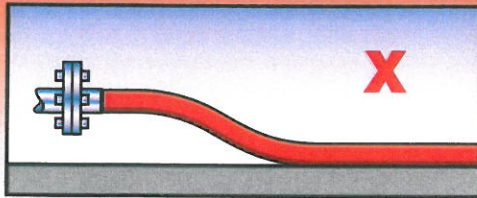


NEVER USE HOSE UNSUPPORTED

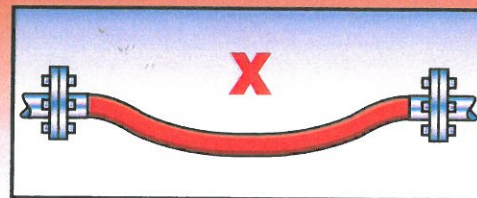


NEVER USE HOSE UNSUPPORTED

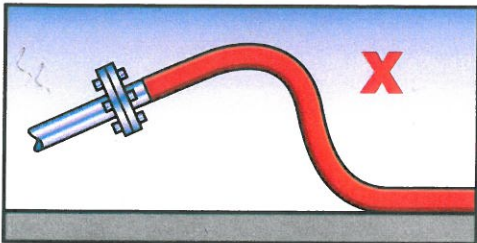


NEVER USE HOSE UNSUPPORTED

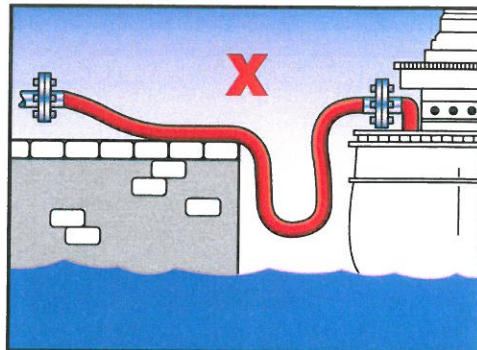

NEVER OVERBEND HOSE OR ALLOW HOSE TO HANG BETWEEN QUAY AND SHIP

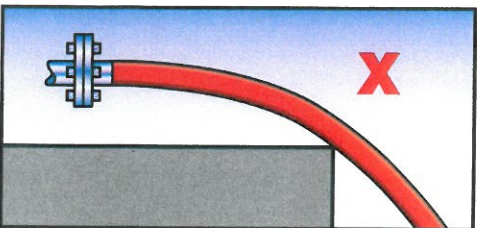


PROTECT AGAINST SHARP EDGES, QUAY EDGE, SHIP'S GUARD RAIL ETC.

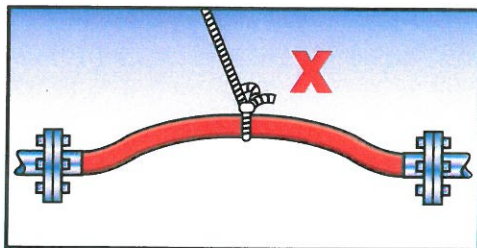


NEVER SUPPORT HOSE WITH SINGLE ROPE


CORRECT

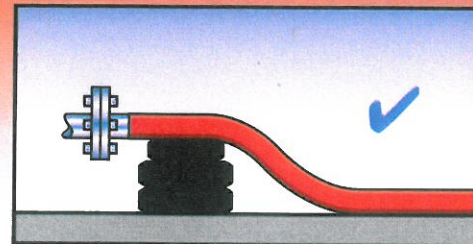


ALWAYS SUPPORT HOSE NEAR COUPLING

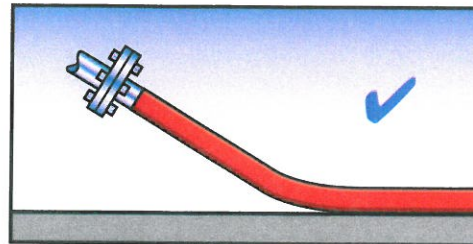


ACCEPTABLE

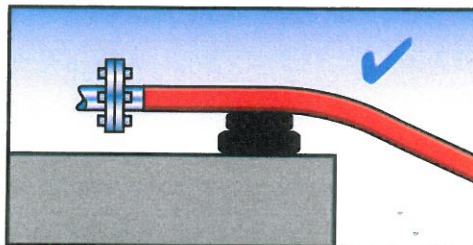

ACCEPTABLE

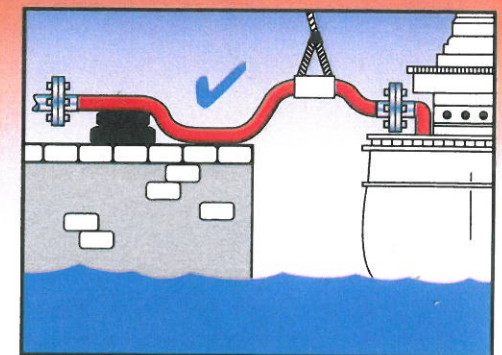

SUPPORT HOSE WITH SLINGS

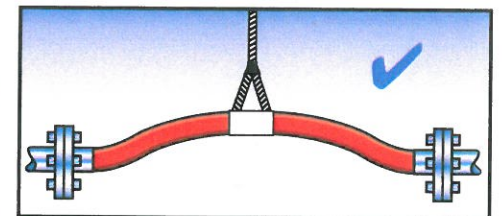

SUPPORT HOSE WITH SLINGS WHERE APPROPRIATE