

DANTEC

MEMBER OF THE
ELAFLEX GROUP



VAPOUR HOSE

VAPOUR HOSE

APPLICABLE STANDARDS

BS EN13765 :2018 Type 1

DNY Type Examination

United States Coastguard

Temperature Range:


-30°C to 80°C

Pressure Range:

Norm 7 bar – but – higher can be accommodated

Vacuum Range:

0.5 BAR

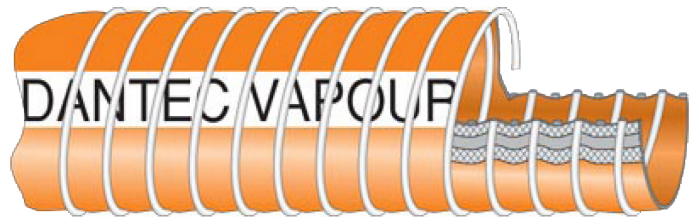

Danoil VR GG, SG, SS is a composite hose, purpose built for vapour return of hydrocarbon products in marine, road and rail tanker operations with Dantec Sure-lec guaranteed electrical continuity.

Danchem VR and Danflon VR are of similar construction to Danoil VR but is suitable for more aggressive chemical applications.

Dantec Vapour Recovery hoses are robust, but lightweight, extremely flexible with the same specially high strength cover as used on all Dantec composite hose.

DANOIL 9 AG or AS

Bore Diameter		Max. Working Pressure		Bend Radius		Weight	
INS	MM	BARS	PSI	INS	MM	KG/M	B/FT
3	75	7	100	8.0	205	2.4	1.6
4	100	7	100	10.5	265	3.4	2.3
6	150	7	100	19.0	485	8.3	5.6
8	200	7	100	27.5	700	12.5	8.4
10	250	7	100	35.0	880	20.5	13.7

